

# 1/4" 3/8"

# Impulsschrauber mit Abschaltung



## 1/4" Sechskant




RRI-30STA



RRI-50STA




RRI-40STA

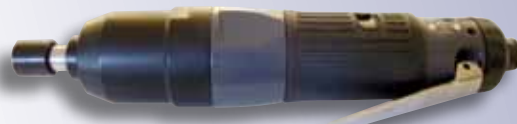


RRI-60STA  
RRI-70STA

Typ	Antrieb	Schraub- Ø mm	Drehzahl Min <sup>-1</sup>	Drehmoment Nm*	Luft- verbrauch l/Sek.	Gewicht kg	Anschluss- gewinde	Schlauch- Ø mm	Geräusch- pegel dB(A)
RRI-30STA	1/4" 6K	6	4.200	6 - 11,5	3,7	0,77	PT 1/4"	6,5	78
RRI-40STA	1/4" 6K	6-8	4.200	10 - 17	3,7	0,8	PT 1/4"	6,5	78
RRI-50STA	1/4" 6K	8	6.800	15 - 25	5,3	0,8	PT 1/4"	6,5	80
RRI-60STA	1/4" 6K	8	6.000	20 - 30	6,2	0,86	PT 1/4"	8	80
RRI-70STA	1/4" 6K	8 - 10	5.000	28 - 40	6,2	0,97	PT 1/4"	8	80

## 3/8" Vierkant

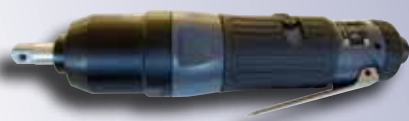

RRI-30ST

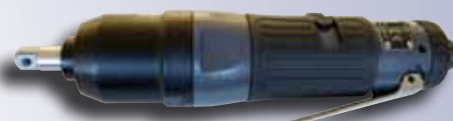

RRI-50ST




RRI-40ST



RRI-60ST  
RRI-70ST

Typ	Antrieb	Schraub- Ø mm	Drehzahl Min <sup>-1</sup>	Drehmoment Nm*	Luft- verbrauch l/Sek.	Gewicht kg	Anschluss- gewinde	Schlauch- Ø mm	Geräusch- pegel dB(A)
RRI-30ST	3/8" 4K	6	4.200	7 - 12,5	3,7	0,8	PT 1/4"	6,5	78
RRI-40ST	3/8" 4K	6-8	4.200	11 - 19	3,7	0,8	PT 1/4"	6,5	78
RRI-50ST	3/8" 4K	8	6.800	16 - 27	5,3	0,8	PT 1/4"	6,5	80
RRI-60ST	3/8" 4K	8 - 10	6.000	22 - 35	6,2	0,86	PT 1/4"	8	80
RRI-70ST	3/8" 4K	10	5.000	31 - 47	6,2	0,97	PT 1/4"	8	80

## Abmessungen

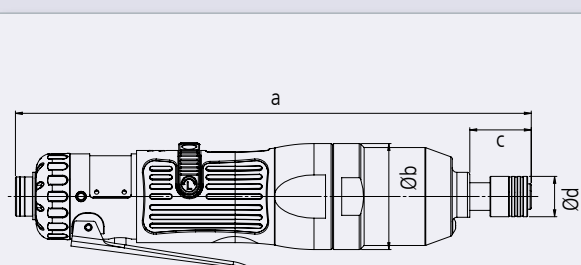

Typ	a mm	b mm	c mm	d mm
RRI-30STA	219	Ø46	21	Ø17,5
RRI-40STA	224	Ø46	27	Ø17,5
RRI-50STA	224	Ø46	27	Ø17,5
RRI-60STA	225	Ø46	27	Ø17,5
RRI-40ST	221	Ø46	24	Ø12
RRI-50ST	221	Ø46	24	Ø12
RRI-60ST	231	Ø46	24	Ø12
RRI-70ST	244	Ø48	25	Ø12