

# 1/4" 3/8"

# Impulsschrauber Ohne Abschaltung



## 1/4" Sechskant



RRI-30SA



RRI-50SA




RRI-40SA




RRI-60SA  
RRI-70SA

Typ	Antrieb	Schraub- Ø mm	Drehzahl Min <sup>-1</sup>	Drehmoment Nm*	Luft- verbrauch l/Sek.	Gewicht kg	Anschluss- gewinde	Schlauch- Ø mm	Geräusch- pegel dB(A)
RRI-30SA	1/4" 6K	6	4.200	6- 11,5	3,7	0,77	PT 1/4"	6,5	78
RRI-40SA	1/4" 6K	6-8	4.200	10- 17	3,7	0,8	PT 1/4"	6,5	78
RRI-50SA	1/4" 6K	8	6.800	15- 25	5,3	0,8	PT 1/4"	6,5	80
RRI-60SA	1/4" 6K	8	6.000	20- 30	6,2	0,86	PT 1/4"	8	80
RRI-70SA	1/4" 6K	8-10	5.000	28- 40	6,2	0,97	PT 1/4"	8	80

## 3/8" Vierkant

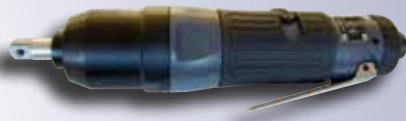

RRI-30S  
RRI-40S

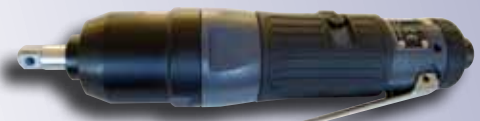

RRI-60S




RRI-50S



RRI-70S

Typ	Antrieb	Schraub- Ø mm	Drehzahl Min <sup>-1</sup>	Drehmoment Nm*	Luft- verbrauch l/Sek.	Gewicht kg	Anschluss- gewinde	Schlauch- Ø mm	Geräusch- pegel dB(A)
RRI-30S	3/8" 4K	6	4.200	7- 12,5	3,7	0,8	PT 1/4"	6,5	78
RRI-40S	3/8" 4K	6-8	4.200	11- 19	3,7	0,8	PT 1/4"	6,5	78
RRI-50S	3/8" 4K	8	6.800	16- 27	5,3	0,8	PT 1/4"	6,5	80
RRI-60S	3/8" 4K	8-10	6.000	22- 35	6,2	0,86	PT 1/4"	8	80
RRI-70S	3/8" 4K	10	5.000	31- 47	6,2	0,97	PT 1/4"	8	80

## Abmessungen

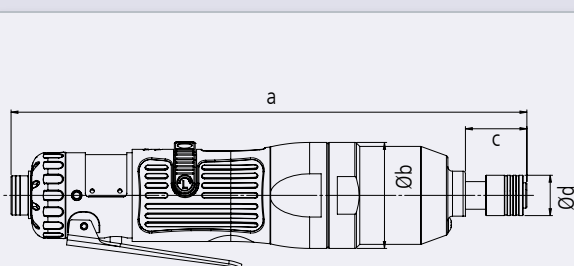

Typ	a mm	b mm	c mm	d mm
RRI-30SA	219	Ø46	21	Ø17,5
RRI-40SA	224	Ø46	27	Ø17,5
RRI-50SA	224	Ø46	27	Ø17,5
RRI-60SA	235	Ø46	27	Ø17,5
RRI-40S	221	Ø46	24	Ø12
RRI-50S	221	Ø46	24	Ø12
RRI-60S	221	Ø46	24	Ø12
RRI-70S	244	Ø48	25	Ø12